


Siata Duplex V360

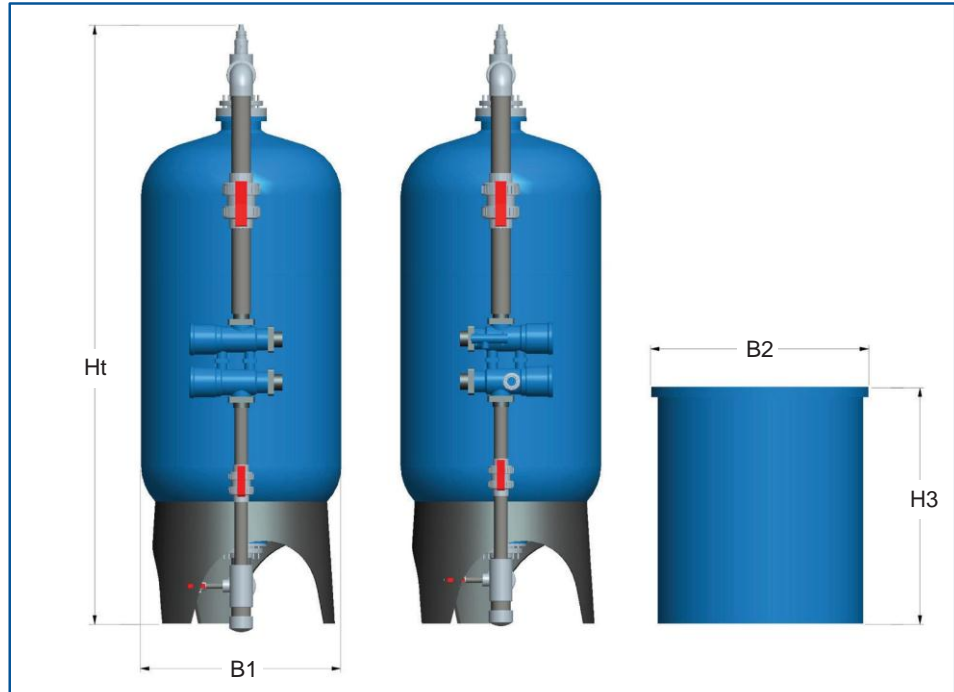

Dimensions (mm)

Resin Litres	Softener Ht	Vessel B1	Brine Tank H3	Brine Tank B2	Inlet/Outlet
500	2250	770	1290	1070	2"
750	2350	927	1290	1070	2"
750HF	2350	927	1290	1070	2½"
850 HF	2635	1074	1500	1260	3"
1000 HF	2635	1074	1500	1260	3"
1250 HF	2635	1226	1500	1260	3"

General conditions for installation

Connection Inlet & Outlet	: 2" (500 - 700 Litre)
	: 2½" (750 Litre High Flow)
	: 3" (850 - 1250 Litre)
Drain Connection *	: 1"
Electrical Rating	: 230-12V / 50 Hz
Power Rating	: 4.6 VA
Minimum Inlet Pressure	: 200 kPa (2 Bar)
Maximum Inlet Pressure	: 600 kPa (7 Bar)
Vacuum	: Not permitted
Average Pressure Loss**	: 100 kPa (1 Bar)
Maximum Water Temperature	: 43°C

* Open drain required

** it is recommended that a 20µm Pre-cartridge filter be installed prior to the inlet of the water softener